


Technical Performance

1. Applicable Standard IEC60099-4
2. Rated Voltage (Ur) 24kV
3. Max. continuous Operating Voltage (Uc) 20kV
4. Nominal discharge current 5kA
5. Creepage Distance 700mm
6. Max. residual Voltage At Lightning current impulse 8/20 μ s 72kV
7. Housing Power Frequency voltage in wet conditions 60kV
8. Housing Lighting Impulse Withstand Voltage 135kV

				Metal-Oxide Surge Arrester Without Gap for A. C-System With Silicon-Polymeric Housing			
Design	Xianguo Wang	Technics		Fig. No.	QTY	Scale	Wight
Drawing	Mr. Wang	Approval	Zhongyuan Ma			1:1	2.3kg
Checked	Javio Zheng	Date	2010-10-05	No.	Page	Total	Page

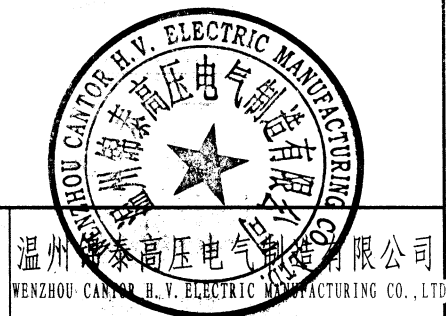

温州坎泰高压电气制造有限公司
WENZHOU CANTOR H.V. ELECTRIC MANUFACTURING CO., LTD

Dimension Drawing

CANTOR-YH5W-24