


COPY #8

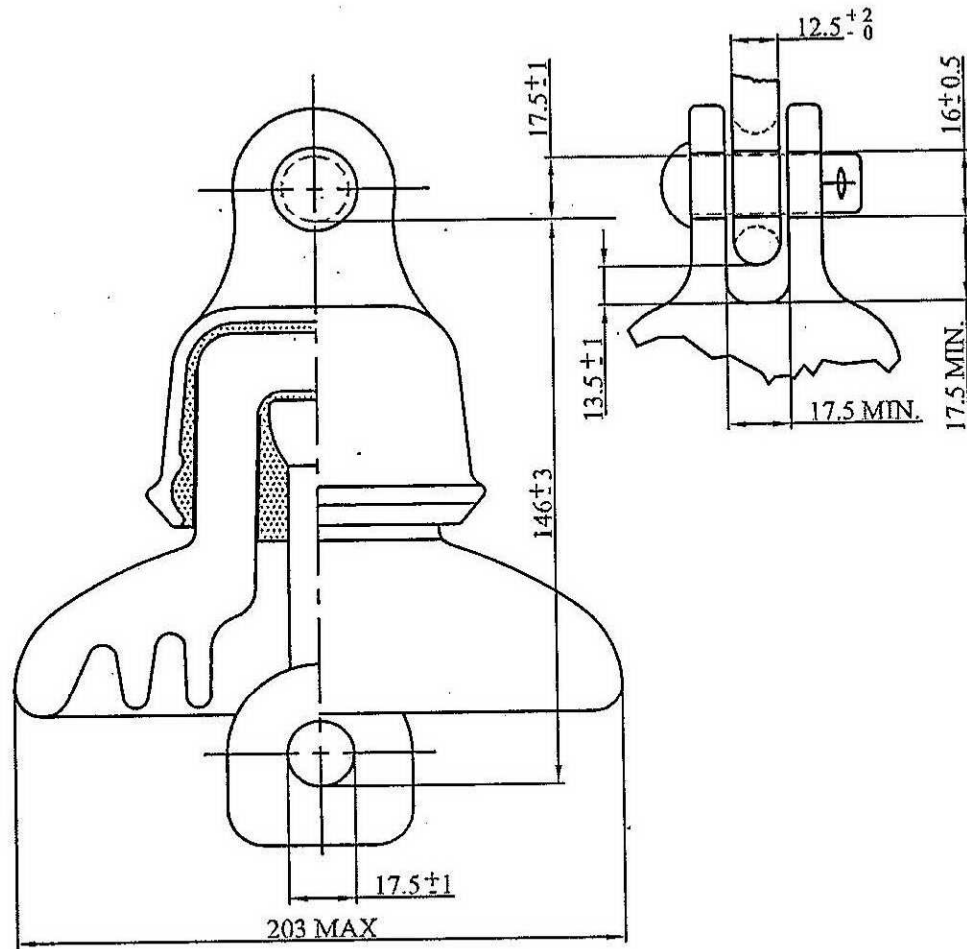

Leakage distance , mm	209.5
Combined mechanical and electrical strical strength , kN	66.72
Mechanical impact strength , cm-N	564.85
Tension proof , kN	33.36
Time load , kN	44.48
Low - frequency dry flashover , kilovolts	65
Low - frequency wet flashover , kilovolts	35
Critical - impulse flashover , positive , kilovolts	115
Critical - impulse flashover , negative , kilovolts	115
Low - frequency puncture , kilovolts	90
Low - frequency test voltage , rms to ground , kilovolts	7.5
Maximum RIV at 1,000 kHz , microvolts	50
Colour of insulator glazed	Brown
Cylindrical Headed With Sanded Surfaces	

INSULATOR SUSPENSION TYPE , ACCORDING TO TIS 354 - 2528 CLASS 52 - 2

CATALOGUE NO. SU - 522

UNIT: mm.

SCALE: NTS.

REV:

DRAWN: *[Signature]*

CHECKED: *[Signature]*

APPROVED: *[Signature]*

FINE ART CERAMIC CO.,LTD

DATE: 1 / 11 / 2007

DRAWING NO. FAC - 070